

JULY 28, 2025

Town of Jay Highway Department
168 Valley Road,
Au Sable Forks, NY 12912

AMENDMENT NO. 1 TO:

PROJECT: Grove Road over Green Street Brook – Culvert Replacement

IN THE LETTING OF
July 31, 2025 at 2:00 PM

NOTICE TO PROSPECTIVE BIDDERS

Project Manual

1. The Bidder shall REPLACE pages II-14 and II-20 of the Bid form with attached pages. These revise the quantity for item #201.06 Clearing and Grubbing and item #699.040001 Mobilization.
2. I. General Bid Information – B. Instructions to Bidders – 8. Contract Times: The following sentence has been added, "Asphalt pavement courses and guide railing installation are not required to consider the project substantially complete."
3. III. Agreement – Article 3 – Contract Times: The following sentence has been added, "Asphalt pavement courses and guide railing installation are not required to consider the project substantially complete."

Construction Plans

1. Dwg. GN-1 – The following revisions have been made:
 - A note was added under the Estimate of Quantities regarding the payment of shear studs on the permanent steel sheeting.
 - The estimated quantity for item #201.06 – Clearing and Grubbing has been changed from 10,000 to 1.
 - The estimated quantity for item #699.040001 – Mobilization has been changed from 16611 to 1.
2. Dwg. ST-7 – The following is added to note 4. "The cost of '¾"Ø Steel Stud, 6" long welded to every other sheet pile' shall be included in Item 552.11 – Permanent Steel Sheeting."



Clarification

1. It is the intent of the Town of Jay to award the project and issue a Notice to Proceed on August 15, 2025.



PLEASE BE GOVERNED ACCORDINGLY WHEN SUBMITTING BIDS.

PLEASE FILL IN AND SIGN BELOW AND RETURN WITH YOUR PROPOSAL
TO ACKNOWLEDGE RECEIPT OF THIS AMENDMENT

PLEASE CONTACT CALEB VICKERY WITH H&T ENGINEERING SERVICES, PLLC
AT
(838) 217-5420 WITH ANY QUESTIONS.

Signed

Date

Representing

Thank you for your cooperation in this matter.

Brought Forward \$_____.

ITEMIZED BID FORM						
ITEM DESCRIPTION	QTY	UNIT	UNIT PRICE IN WORDS		UNIT PRICE (NUMERALS)	TOTAL (NUMERALS)
201.06	CLEARING AND GRUBBING	LS	1	_____ Dollars _____ Cents	\$_____.	\$_____.
202.19	REMOVAL OF SUBSTRUCTURES	CY	12	_____ Dollars _____ Cents	\$_____.	\$_____.
203.02	UNCLASSIFIED EXCAVATION AND DISPOSAL	CY	334	_____ Dollars _____ Cents	\$_____.	\$_____.
203.03	EMBANKMENT IN PLACE	CY	192	_____ Dollars _____ Cents	\$_____.	\$_____.
203.21	SELECT STRUCTURE FILL	CY	132	_____ Dollars _____ Cents	\$_____.	\$_____.

Brought Forward \$_____.

ITEMIZED BID FORM						
ITEM DESCRIPTION	QTY	UNIT	UNIT PRICE IN WORDS		UNIT PRICE (NUMERALS)	TOTAL (NUMERALS)
203.24010017	SHOULDER BACKUP MATERIAL	TON	4	_____ Dollars _____ Cents	\$_____.	\$_____.
206.01	STRUCTURE EXCAVATION	CY	657	_____ Dollars _____ Cents	\$_____.	\$_____.
209.13	SILT FENCE-TEMPORARY	LF	170	_____ Dollars _____ Cents	\$_____.	\$_____.
209.1501	TURBIDITY CURTAIN - TEMPORARY	LF	22	_____ Dollars _____ Cents	\$_____.	\$_____.
304.12	SUBBASE COURSE, TYPE 2	CY	505	_____ Dollars _____ Cents	\$_____.	\$_____.

Brought Forward \$_____.

ITEMIZED BID FORM						
ITEM DESCRIPTION	QTY	UNIT	UNIT PRICE IN WORDS		UNIT PRICE (NUMERALS)	TOTAL (NUMERALS)
404.1989	19 F9 BINDER COURSE ASPHALT, 80 SERIES COMPACTION	TON	118	_____ Dollars _____ Cents	\$_____.	\$_____.
404.3789	37.5 F9 BASE COURSE ASPHALT, 80 SERIES COMPACTION	TON	183	_____ Dollars _____ Cents	\$_____.	\$_____.
407.0102	DILUTED TACK COAT	GAL	153	_____ Dollars _____ Cents	\$_____.	\$_____.
552.11	PERMANENT STEEL SHEETING	SF	3245	_____ Dollars _____ Cents	\$_____.	\$_____.
553.020001	COFFERDAMS (TYPE 2)	EACH	2	_____ Dollars _____ Cents	\$_____.	\$_____.

Brought Forward \$_____.

ITEMIZED BID FORM						
ITEM DESCRIPTION	QTY	UNIT	UNIT PRICE IN WORDS		UNIT PRICE (NUMERALS)	TOTAL (NUMERALS)
553.030001	TEMPORARY WATERWAY DIVERSION STRUCTURE	EACH	1	_____ Dollars _____ Cents	\$_____.	\$_____.
555.08	FOOTING CONCRETE, CLASS HP	CY	27	_____ Dollars _____ Cents	\$_____.	\$_____.
556.0201	UNCOATED BAR REINFORCEMENT FOR CONCRETE STRUCTURES	LB	774	_____ Dollars _____ Cents	\$_____.	\$_____.
603.3101	CORRUGATED STRUCTURAL STEEL PLATE PIPE ARCH (6" X 2")(6'-1" SPAN, 4'-7" RISE)	LF	42	_____ Dollars _____ Cents	\$_____.	\$_____.
606.10	BOX BEAM GUIDE RAILING	LF	193	_____ Dollars _____ Cents	\$_____.	\$_____.

Brought Forward \$_____.

ITEMIZED BID FORM						
ITEM DESCRIPTION	QTY	UNIT	UNIT PRICE IN WORDS		UNIT PRICE (NUMERALS)	TOTAL (NUMERALS)
606.120201	BOX BEAM GUIDE RAILING END ASSEMBLY, TYPE IIA	EACH	4	_____ Dollars _____ Cents	\$_____.	\$_____.
610.1605	TURF ESTABLISHMENT PERFORMANCE	SY	117	_____ Dollars _____ Cents	\$_____.	\$_____.
619.01	BASIC WORK ZONE TRAFFIC CONTROL	LS	1	_____ Dollars _____ Cents	\$_____.	\$_____.
619.04	TYPE III CONSTRUCTION BARRICADE	EACH	6	_____ Dollars _____ Cents	\$_____.	\$_____.
620.03	STONE FILLING (LIGHT)	CY	20	_____ Dollars _____ Cents	\$_____.	\$_____.

Brought Forward \$_____.


ITEMIZED BID FORM						
ITEM DESCRIPTION	QTY	UNIT	UNIT PRICE IN WORDS		UNIT PRICE (NUMERALS)	TOTAL (NUMERALS)
620.29010009	NATIVE STREAM BED MATERIAL (A)	CY	49	_____ Dollars _____ Cents	\$_____.	\$_____.
623.12	CRUSHED STONE (IN-PLACE MEASURE)	CY	7	_____ Dollars _____ Cents	\$_____.	\$_____.
625.01	SURVEY OPERATIONS	LS	1	_____ Dollars _____ Cents	\$_____.	\$_____.
627.50140008	CUTTING PAVEMENT	LF	40	_____ Dollars _____ Cents	\$_____.	\$_____.
646.22	DELINEATOR, SNOWPLOWING MARKER, SUPPLEMENTARY SNOWPLOWING MARKER PANELS	EACH	6	_____ Dollars _____ Cents	\$_____.	\$_____.

Brought Forward \$_____.


ITEMIZED BID FORM						
ITEM DESCRIPTION	QTY	UNIT	UNIT PRICE IN WORDS		UNIT PRICE (NUMERALS)	TOTAL (NUMERALS)
646.32	STEEL POST, 2.0 LB/FT	EACH	4	_____ Dollars _____ Cents	\$_____.	\$_____.
685.1102	WHITE EPOXY REFLECTORIZED PAVEMENT STRIPES - 20 MIL	LF	700	_____ Dollars _____ Cents	\$_____.	\$_____.
685.1202	YELLOW EPOXY REFLECTORIZED PAVEMENT STRIPES - 20 MIL	LF	700	_____ Dollars _____ Cents	\$_____.	\$_____.
Subtotal				_____ Dollars _____ Cents	\$_____.	
699.040001	MOBILIZATION (4% MAXIMUM)	LS	1	_____ Dollars _____ Cents	\$_____.	\$_____.

Brought Forward \$_____.

ITEMIZED BID FORM						
ITEM DESCRIPTION	QTY	UNIT	UNIT PRICE IN WORDS		UNIT PRICE (NUMERALS)	TOTAL (NUMERALS)
Total						

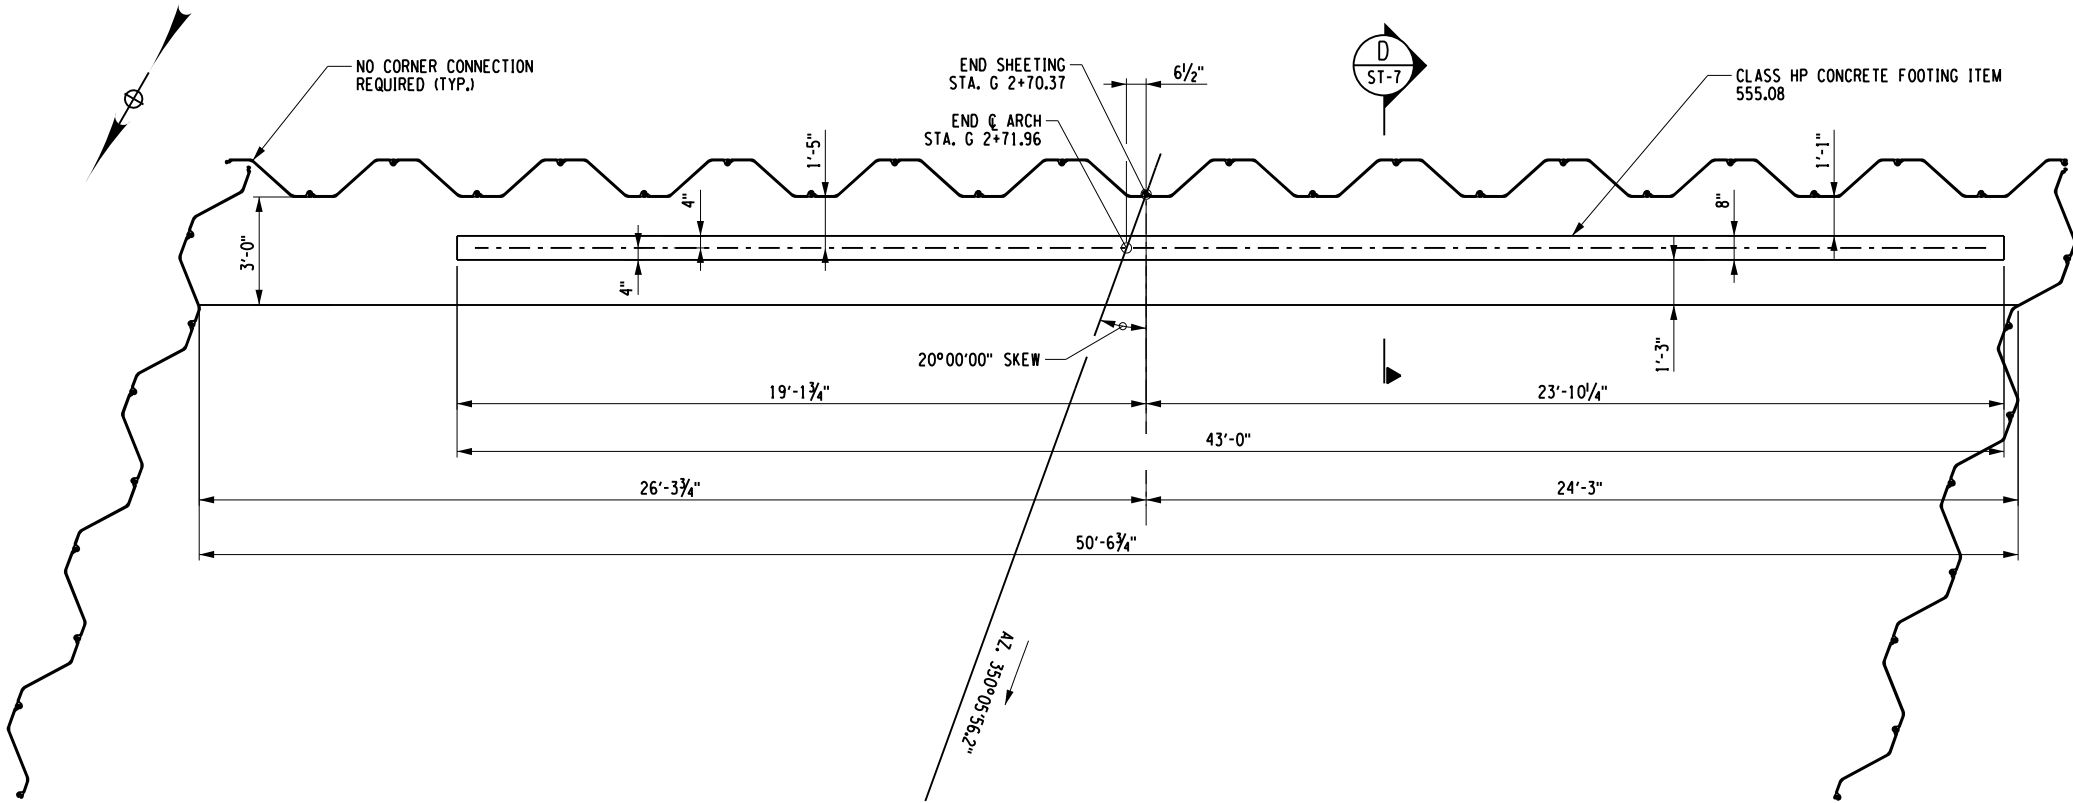

END FOOTING PLAN
SCALE: $\frac{3}{16}" = 1'-0"$



- NOTES:

LAP LENGTHS	
BAR	MIN. LENGTHS
#5	2'-4"

CULVERT REPLACEMENT PLAN
GROVE ROAD OVER
GREEN STREET BROOK
TOWN OF JAY, ESSEX COUNTY, NEW YORK

FOOTING PLANS & ELEVATIONS

H H&T
Engineering, PLLC
14 Commerce Dr. Clifton Park, NY 12015

TOWN OF JAY
P.O. BOX 730
11 SCHOOL LANE
AU SABLE FORKS, NY 12912

[illegible]